



An ISO 9001:2015 Company


3 PHASE HIGHLY INSULATED FRP TELESCOPIC EARTH / DISCHARGE ROD

MODEL - 66-132KV

**"KUSAM MECO" Highly insulated FRP Telescopic Earth/Discharge Rod
Manufactured in fully automatic Pultrusion Plant having strong
Electrical & Mechanical Strength.**

TECHNICAL SPECIFICATION :

- **Rods.** : 3 nos.
- **Material** : FRP Pultruded.
- **Process** : Automatic Pultrusion Plant.
- **Surface** : Smooth and Glossy.
- **Design** : Telescopic Type.
- **Locking** : Push Button type Locking System.
- **Total Section of each rod** : 03 Section
- **Assembled Length** : 18 feet Length.
- **H.V.Test** : 110 KV
- **Glass Content** : 65 %.
- **Top Section Dia** : 25 mm.
- **Bottom Section Dia** : 45 mm.
- **Earthing** : Die cast Alu. Earthing instrument for 50mm Dia
- **Cable** : 16 sq. mm copper cable 08 mtr. long.
- **Clamp** : Aluminium "C" grounding clamp.
- **Cover** : Cover including.

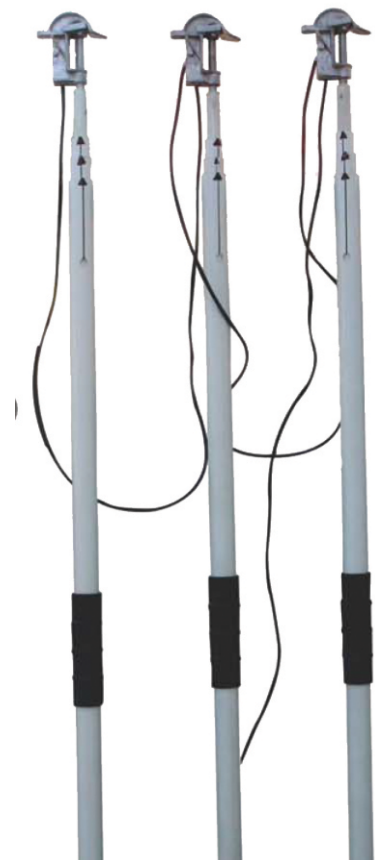

All Specifications are subject to change without prior notice



An ISO 9001:2015 Company

G-17, Bharat Industrial Estate, T. J. Road, Sewree (W), Mumbai - 400 015. INDIA.

Sales Direct.: 022 -24156638, 27754546 **Tel. :** 24124540, 24181649, 27750662/0292

Email : sales@kusam-meco.co.in

Website : www.kusamelectrical.com