

DM3V 3 Phase AC Voltage Digital Meter

KUSAM-MECO®

An ISO 9001:2008 Company

■ FEATURES

- Display values of 3 phase simultaneously
- Switch between 3P3W / 3P4W system
- 4 Alarm setting functions
- Programmable for PT ratio
- With OFFSET adjustment
- Self-testing function with easy operation
- RS-485MODBUS RTU with Max.baudrate 38400



DM3V

Code1	Input Signal	Code2	Alarm Setting	Code3	Output 1	Code4	Output2	Code5	Aux. Power
1	AC 0~440V	1	3 Alarm Setting	1	DC 0~10mA	6	RS 485	3	DC 22~72V
Y	Other	2	4 Alarm Setting	2	DC 0~20mA	0	None	6	AC/DC 85~265V
		0	None	3	DC 4~20mA	Y	Other	Y	Other
				4	DC 0~5V				
				5	DC 1~5V				
				6	DC 0~10V				
				0	None				
				Y	Other				

SPECIFICATIONS:

INPUT:

Input Frequency : 45 ~ 70Hz.
 Input Burden : 0.25VA at 60Hz.
 Input Over : Normal AC 440V(MAX AC 500V), Voltage Over 600V Continuous. 1200V 10 Sec/Hour

OUTPUT & DISPLAY:

DC Current: 0 – 20 mA DC

DC Voltage: 0 – 10 V DC

Load resistance drive: output drive 10 VDC maximum

Load resistance drive: output drive 5 mA maximum

Output Load Resistance

Output Load Resistance

0 – 10 mA : 1000 Ω

0 – 5 V : 1 KΩ

0 – 20 mA : 500 Ω

1 – 5 V : 1 KΩ

4 – 20 mA : 500 Ω

0 – 10 V : 2 KΩ

Output Response Time : ≤ 1 Sec.

Output Protection : Without Damage for Output Open or Short Circuit.

Digital Output : RS-485 Output, 1200,2400,4800,9600,19200 Baud Rate, User Selectable.

Display Range : 0.39" High brightness RED LED , 4 Digits, 9999Counts

INSTALLATION & PERFORMANCE:

Accuracy : 0.5%FS+1 Counts. Avg. Typically at 23°C±3°C.

Setting Function : 4 Alarm Setting, Setting Function(Hi or Lo) User Selectable.

Setting Range : 9999 Counts User Selectable.

Dead Band : 0 ~ 9999 Counts User Selectable.

Time Delay : 0 ~ 999 Sec. User Selectable.

SPDT Capacity : AC 120V 3A., DC 30V 3A.

Dielectric Strength : 2KV AC / Min Between Input / Power / Case.

Impulse : 5 KV 1.2x50 uS, ANSI C37.90a / 1983.DIN IEC 255 – 4.

Stability : ≤ 0.2%/Year.

Temperature Coefficient : ≤ 60ppm / °C From 0~ 60°C ; ≤ 50ppm/25°C ±5°C

Operating Condition : -10°C ~ +55°C 20 ~ 95% RH Non-Condensed.

Storage Condition : -40°C ~ +75°C 20 ~ 95% RH Non-Condensed.

Consumed Power : ≤ 3VA, PF = 1


Power Supply : AC or DC ±20%, 50 / 60Hz.

Outline Dimension : 1/8 DIN 96W X 48H X 100D mm.


Mounting : Panel Flush Mounting.

All Specifications are subject to change without prior notice.


■ Size (mm)

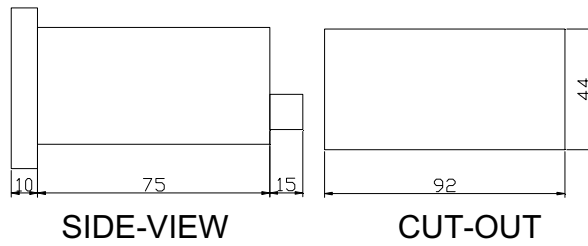

■ Keys

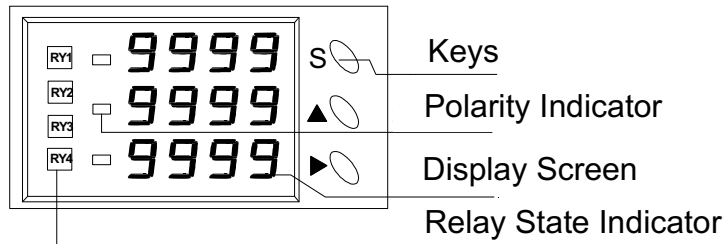

■ Connection Diagram

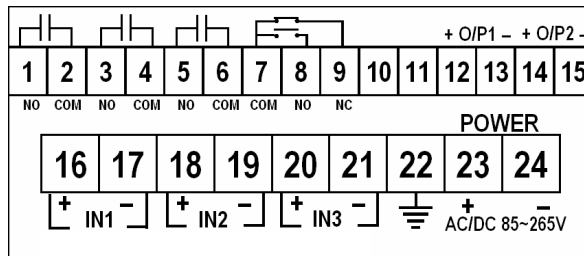

All Specifications are subject to change without prior notice.

KUSAM-MECO[®]
An ISO 9001:2008 Company

G-17, Bharat Industrial Estate, T. J. Road, Sewree (W), Mumbai - 400 015. INDIA.
Sales Direct.: 022-24156638, Tel. : 022-24124540, 24181649, Fax : 022-24149659
Email : kusam_meco@vsnl.net, Website : www.kusamelectrical.com